

# Power Sports Batteries

**GOLD**
**SILVER**

ACDelco offers a full line of Power Sports batteries available in both Gold AGM (Absorbent Glass Mat) and Silver Conventional types with sizes fitting the popular applications. ACDelco Power Sports batteries offer an excellent value with a 12-month free replacement warranty\*, durable construction, and packaging, and in many cases spacers and extra hardware for mounting in various OE (Original Equipment) replacement applications. All ACDelco Power Sport batteries contain a patented additive to help minimize sulfation during long periods of non-use. These batteries are engineered for the demanding Power Sports user and designed to meet or exceed OE specifications!


**GOLD**
**GOLD AGM / SILVER CONVENTIONAL**
**SILVER**

ATV - Motorcycle - Personal Watercraft - Scooter - Snowmobile - Utility Vehicles



Harley-Davidson 1200C XL Sportster



Polaris Switchback Pro X 800



Can-Am Outlander



Yamaha WaveRunner



John Deere Gator

07-SS-1039-22E\_CA22-A-EN


# Power Sports Batteries

**GOLD**
**SILVER**

## Power Sport Battery Types

### AGM

These batteries feature advanced AGM (Absorbent Glass Mat) technology that helps improve life and performance over conventional flooded batteries, with tough through-the-partition construction to shorten the electrical current path and reduce resistance resulting in boosted cranking power. Specialized Lead/Calcium alloy reduces self-discharge and maximizes starting power even after months of storage. Our AGM batteries are manufactured under strict quality control to offer excellent performance and long life. The AGM design allows easy installation without the worry of acid spills (after activation) and the need to check water, truly Maintenance Free.

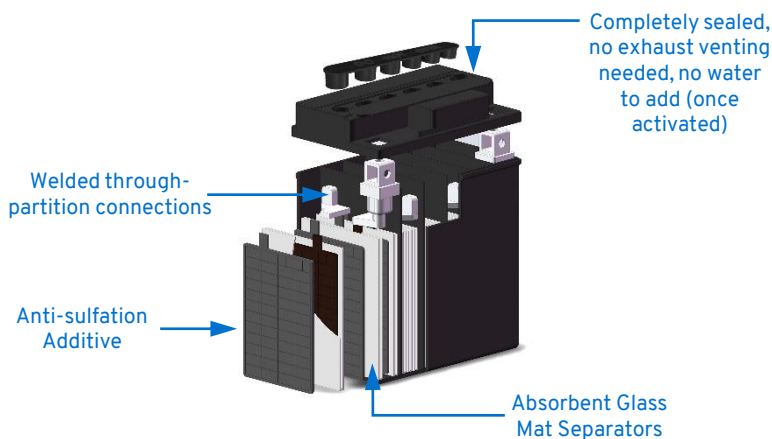


- By design, AGM technology provides increased vibration resistance, improving life - even in tough applications
- AGM batteries have improved recharging capabilities compared to flooded batteries
- AGM batteries are rated DOT non-spillable as the electrolyte is absorbed in the Glass Mat
- No exhaust venting required, totally sealed
- Shipped dry and unfilled for very long shelf life
- Once filled the non-removable vent plugs will seal the battery, no water to check

### Conventional

These batteries feature a premium polypropylene separator (vs. low-cost paper separators) to help ensure robust separation of positive and negative plates for longer short-free life. All ACDelco Silver Power Sports batteries use through-the-partition welded construction providing less resistance and higher cranking power than commonly used loop construction. These batteries are shipped dry with an acid bottle providing long storage life until you are ready to add acid and activate.

- Premium construction compared to many competitors flooded batteries
- Translucent case for easier filling and maintenance (once filled and activated, water levels should be checked every few months)
- Polypropylene cover and container resists damage from gas, oil, and other chemicals
- Sealed terminals and heat-sealed cover help protect against seepage, reduces corrosion, and extends battery life
- Vent tube and hardware included

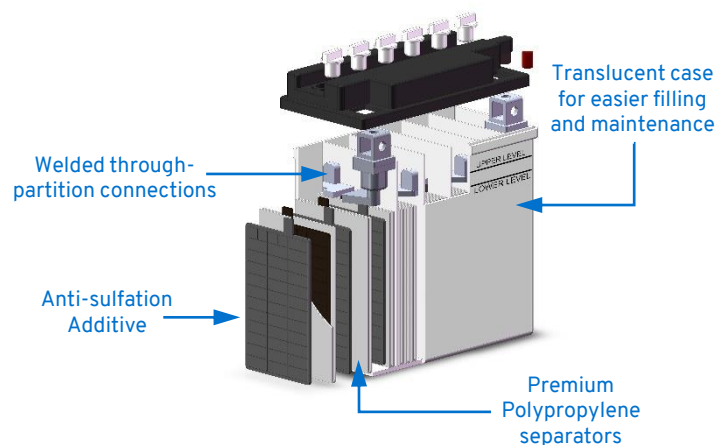

Free replacement limited warranty to the original retail purchaser. See [acdelcocanada.com](http://acdelcocanada.com) for details.

07-SS-1039-22E\_CA22-A-EN

# Power Sports Batteries

**GOLD**
**SILVER**

ACDelco	Type	BCI Terminal	Positive	Warranty	CCA	RC	Ah <sub>10</sub>	CA	Length (inches)	Width (inches)	Height (inches)	Weight (lbs.)	Length (mm)	Width (mm)	Height (mm)	Weight (Kg)	Additional:
ACTX30LBSA	AGM	4	RH	12	400	50	30	500	6.6	4.9	6.9	20.7	166	126	175	9.4	Spacer + Hardware
ACTX24HLBS	AGM	4	RH	12	350	33	21	438	8.1	3.4	6.4	14.4	205	87	162	6.6	Extra Hardware
ACTX20LBS	AGM	4	RH	12	270	28	18	338	6.9	3.4	6.1	12.6	175	87	155	5.7	Spacer + Hardware
ACTX20CHBS	AGM	4	LH	12	270	28	18	338	6.0	3.4	6.4	11.2	150	87	161	5.1	
ACTX20BS	AGM	4	LH	12	270	28	18	338	6.9	3.4	6.1	12.6	175	87	155	5.7	Extra Hardware
ACTX16BS1	AGM	1	LH	12	230	21	14	288	5.9	3.4	6.9	10.4	150	87	161	4.7	
ACTX14BBS	AGM	11	LH	12	220	18	12	275	5.9	3.4	5.8	8.6	150	70	145	3.9	Brass Terminal
ACTX14AHBS	AGM	4	LH	12	210	18	12	263	5.3	3.5	6.6	10.0	134	89	166	4.5	Height Spacer
ACTX14AHLBS	AGM	4	RH	12	210	18	12	263	5.3	3.5	6.6	10.0	134	89	166	4.5	
ACTX14BS	AGM	5	LH	12	200	18	12	250	5.9	3.4	5.8	8.6	150	87	146	3.9	Extra Hardware
ACTX14LBS	AGM	5	RH	12	200	18	12	250	6.0	3.4	5.7	8.6	150	87	146	3.9	Extra Hardware
ACTZ14SBS	AGM	11	LH	12	230	16	11.2	288	5.9	3.4	4.3	8.4	150	87	110	3.8	Brass Terminal
ACTX12BBS	AGM	11	LH	12	210	14	10	263	6.0	2.8	5.1	7.9	150	70	130	3.6	Brass Terminal
ACTX12BS	AGM	5	LH	12	180	14	10	225	5.9	3.5	5.1	7.5	150	87	131	3.4	
ACTX12ABS	AGM	11	LH	12	175	14	10	219	5.9	3.4	4.2	7.5	150	87	105	3.4	Brass Terminal
ACTZ10SBS	AGM	11	LH	12	190	12	8.6	238	5.9	3.4	3.7	6.4	150	87	93	2.9	Brass Terminal
ACTX9BS	AGM	5	LH	12	135	11	8	169	5.9	3.4	4.2	5.7	150	87	106	2.6	
ACTX9BBS	AGM	11	LH	12	120	11	8	150	5.9	2.7	4.1	6.2	150	70	105	2.8	Brass Terminal
ACTZ7SBS	AGM	11	RH	12	130	8	6	163	4.4	2.8	4.2	4.2	113	70	105	1.9	
ACTX7BBS	AGM	11	LH	12	120	8	6	150	5.9	2.6	3.7	4.9	150	65	93	2.2	Brass Terminal
ACTX7ABS	AGM	4	LH	12	105	8	6	125	5.9	3.4	3.6	5.0	150	87	94	2.3	
ACTX7LBS	AGM	4	RH	12	100	8	6	125	4.4	2.8	5.2	4.9	112	70	131	2.2	
ACTX5LBS	AGM	4	RH	12	60	5	4	75	4.4	2.8	4.2	3.4	112	70	105	1.6	
ACTX4LBS	AGM	5	RH	12	40	4	3	50	4.4	2.8	3.4	2.6	112	70	86	1.2	
ACB14AA2	Conv	5	LH	12	180	18	14	225	5.3	3.6	6.8	9.5	134	89	176	4.3	
ACB14A2	Conv	8	LH	12	180	18	14	225	5.3	3.6	6.6	9.4	134	89	166	4.3	
ACB14LA2	Conv	8	RH	12	180	18	14	225	5.3	3.6	6.6	9.4	134	89	166	4.3	
ACB12AA	Conv	6	LH	12	160	18	12	200	5.3	3.2	6.3	8.6	135	80	160	3.9	
ACB12CA	Conv	4	LH	12	160	18	12	200	5.3	3.2	6.9	8.8	134	80	175	4.0	
ACB12N94B1	Conv	6	LH	12	85	11	9	106	5.3	3.0	5.5	6.7	135	75	139	3.0	

ACDelco has chosen to focus on more AGM offerings as they can be used in place of many conventional batteries and offer superior performance, safety, and value. CCA is at 0°F (-18°C) / CA is at 32°F (0°C); Reserve Capacity measured in Minutes; 12v Nominal Voltage; Weight after formation including electrolyte.

## Charging

Do not use a standard automotive charger to charge these batteries. Use a charger that has 0.5 Amp increments and use a charger with an AGM setting for AGM batteries. See included owner's manual for detailed instructions

## Off-Season Storage

To maximize battery life, Power Sport Batteries should be brought up to a full charge and stored in a cool place (above 32°F/0°C) for off season storage. A fully charged battery has a better chance of lasting during the off-season and being ready when needed. Inspect the battery every 2 months and recharge if needed. If the voltage falls below 12.4 volts, a refresh charge is suggested.

Free replacement limited warranty to the original retail purchaser. See [acdelcocanada.com](http://acdelcocanada.com) for details.

07-SS-1039-22E\_CA22-A-EN

# Power Sports Batteries

**GOLD**
**SILVER**

## Application Coverage Table

Rank	ACDelco #	Replaces	Coverage	Cumulative Coverage							
					Motorcycle	Scooter	ATV	PWC	Snowmobile	UTV	Lawn Tractor
1	ACTX14BS	--	10.6%	10.6%	✓	✓	✓		✓	✓	
2	ACTX5LBS	--	7.0%	17.6%	✓	✓	✓				
3	ACTX20LBS	CB16CLB	6.2%	23.8%	✓		✓	✓	✓	✓	
4	ACTX9BS	--	5.8%	29.6%	✓	✓	✓				
5	ACTX14AHBS	14-A2, 14A-A2 14-B2, 14A-A1	5.7%	35.3%	✓		✓		✓	✓	
6	ACTX4LBS	--	5.4%	40.7%	✓	✓	✓				✓
7	ACTX12BS	--	4.8%	45.5%	✓	✓	✓			✓	
8	ACTX7ABS	--	4.6%	50.1%	✓	✓	✓				
9	ACTX30LBSA	30L-B, 30LB-BS 30CL-B, 30CLB-BS	4.2%	54.3%	✓		✓	✓	✓	✓	
10	ACTX14AHLBS	14L-A2, 12N14-3A 14L-B2, 12N14-3B	3.0%	57.3%	✓	✓	✓	✓	✓		
11	ACTZ7SBS	YTZ7S	2.8%	60.1%	✓	✓	✓				
12	ACB14LA2	--	2.7%	62.8%	✓	✓	✓	✓	✓		✓
13	ACTX7LBS	--	2.4%	65.2%	✓	✓	✓				
14	ACTZ10SBS	YTZ10S	2.2%	67.4%	✓	✓	✓				
15	ACB14AA2	14A-A1	1.9%	69.3%			✓		✓	✓	
16	ACTX24HLBS	C50-N18L-A3 C50-N18LA	1.7%	71.0%	✓		✓		✓	✓	✓
17	ACTX7BBS	YT7B-4	1.5%	72.5%	✓		✓				
18	ACB12AA	12N12A-4A-1	1.3%	73.8%	✓		✓				✓
19	ACTZ14SBS	YTZ14S	1.3%	75.1%	✓	✓					
20	ACB14A2	--	0.9%	76.0%	✓		✓		✓		✓
21	ACTX14BBS	YT14B-4	0.8%	76.8%	✓						
22	ACB12N94B1	--	0.5%	77.3%	✓	✓					✓
23	ACTX12ABS	--	0.4%	77.7%	✓	✓					
24	ACTX20CHBS	--	0.4%	78.1%	✓	✓	✓		✓		
25	ACTX12BBS	YT12B-4	0.4%	78.5%	✓						
26	ACTX20BS	C18L-A	0.3%	78.8%	✓		✓	✓	✓		
27	ACTX9BBS	YT9B-4	0.3%	79.1%	✓	✓	✓				
28	ACB12CA	--	0.2%	79.3%			✓				
29	ACTX14LBS	--	0.2%	79.5%	✓						
30	ACTX16BS1	--	0.2%	79.7%	✓		✓				
Total:			79.7%								

Free replacement limited warranty to the original retail purchaser. See [acdelcocanada.com](http://acdelcocanada.com) for details.

07-SS-1039-22E\_CA22-A-EN